


## Locking Flush Pulls with External Function - Timber Fixing

All Chant Flush VS Locking Flush Pulls with an external function are fitted using the back to back mounting system. This ensures the external flush pull cannot be removed exposing the locking slide bar. The external flush pull is attached from the inside of the door through the internal mounting blocks.

The inside Flush Pull is inserted into the mounting blocks then fastened with a socket set screw at the top of the finger recess.

Turn Privacy and Euro Locking Flush Pulls utilise the same mounting system but locks do not have a slide bar.

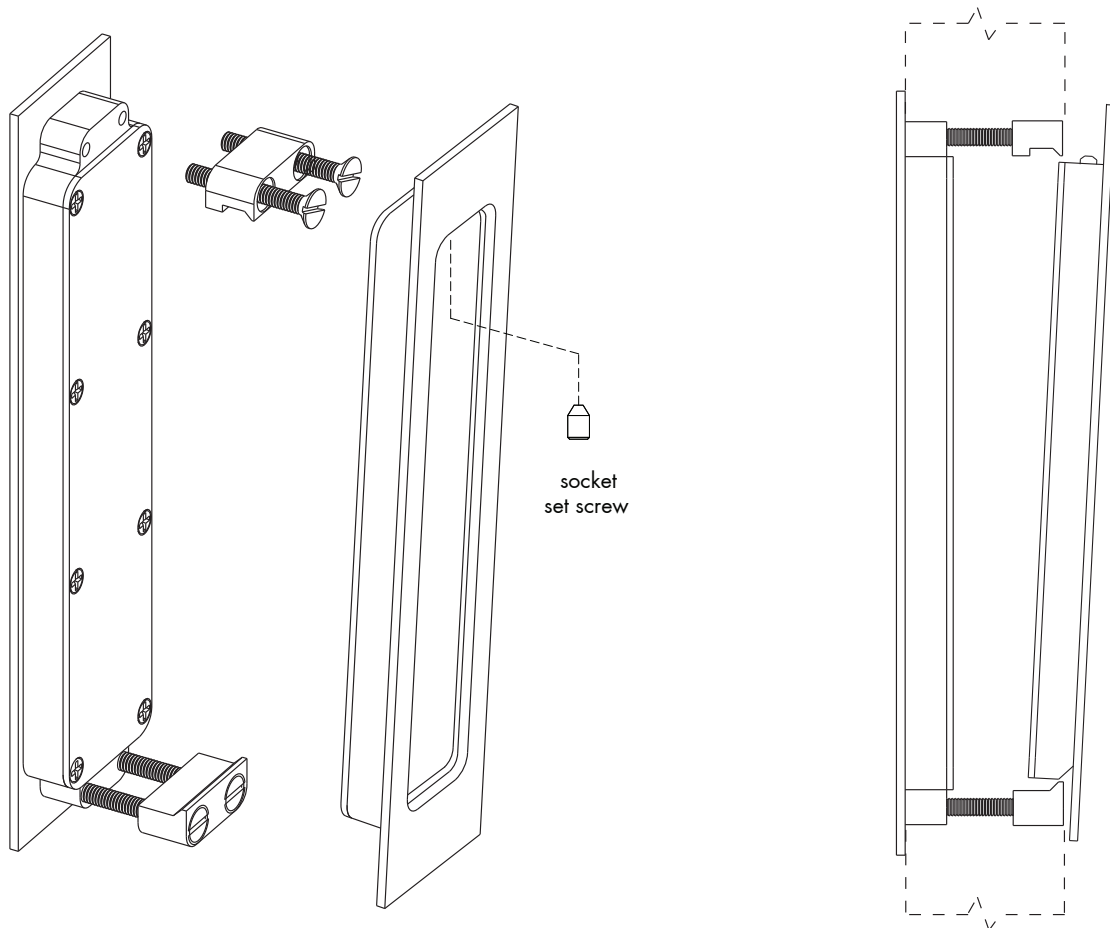

All Flush Locking Systems require a minimum door thickness of 38mm. This does not include the Slim VS Privacy Product.

Contact us for information on custom solutions for narrower doors.