
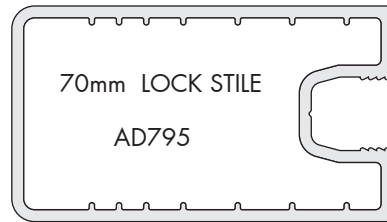


VS Locking Flush Pull Face Plate Options - Australian Fabricator

Due to design differences with Australian Aluminium profiles there are two stiles of face plate configuration available. The most common of these stiles are the below profiles. As the stile has a flat front face the flush fitting method is the ideal option. Face plate option B does provide for simpler install and also has the benefit of moving the back set forward by 1.5 - 2mm which is the face plate thickness.

The principle of these face plates applies to the VS Locking and some VS Euro Locking Products. Specify the face plate type when ordering these products and use the Chant 'Sliding Door' order form where possible.

Typical Aluminium Profile:



31mm Back Set

The Chant 31.5mm (A) backset products with Flush Fit Face Plate were developed for section AD745. The VS Locking Products, LO, SO, IO in the 38mm width only are suitable for this. There is no machining of the aluminium glazing channel required for these products.

Please note the receiving stile must be considered when specifying these due to the position of the flush pull. The flush pulls in this category have a flexible adjustment of +/- 5mm left to right from the slide adjustment positions

35 & 50mm Back Set (see 'Back set Info' tech sheet for more info')

The 35mm back set products should be used where possible on section type AD795. 50mm back set products will only suit the larger width extrusion profiles.

Strikes: Due to the variables in joinery configurations, strikes are always sold separately.

