


SDC - Flush Pulls

Long Opening (LO)

Long opening pocket to match compression turn & thumb turn options.

Outside
Concealed fix

Inside
Visible fix




Compression Turn and Thumb Turn

Compression Turn at the top

"Throws the bolt to lock the doors together then compresses the door seals"



Thumb Turn at the bottom

"Locks and unlocks the lock"



Compression Turn

Used on doors where a compression function is required such as sealing an acoustic doors




Mounting

Minimum Door Thickness

Flange Mounted 40mm 1.60in

Flush Mounted 44mm 1.75in

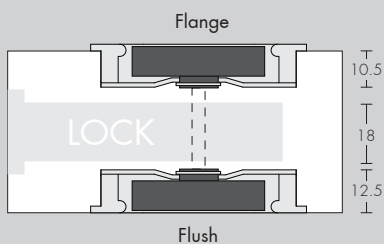

Dimensions

* Rounded & recessed edge for comfort and increased grip

