

Twin Bolt - Handles

Designed to operate with twin bolt mechanisms, minimal handle rotation of 65° to retract the rods.

Fixings are hidden behind the lever when in the vertical position.

- Timber Joinery, 10G, Steel/Alloy M5
- Non Handed
- Solid brass construction
- 8mm square spindle

Twin Bolt - Handle


180 Degree (65, 90, 115 & 180 Degree detent positions)



Marua
4335



Asta
4336

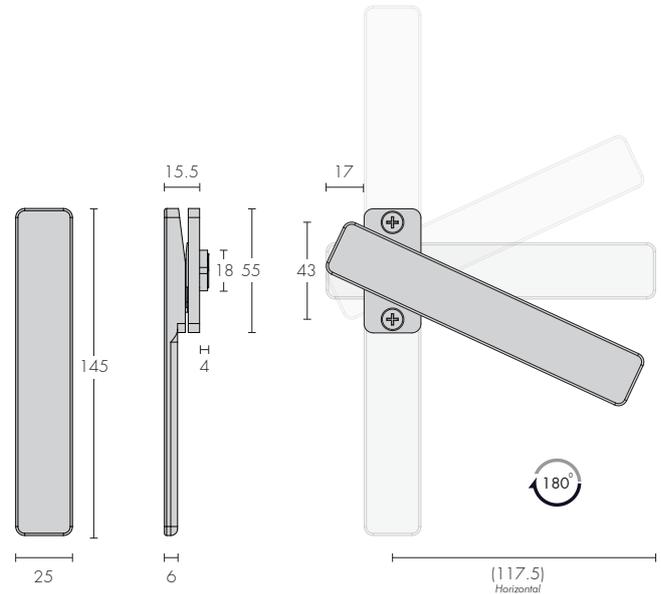

Twin Bolt - Handle

90 Degree (65, 90 Degree detent positions)



Line
4330



Bella
4331

