
# Security Stays

The Security Stays have semi-concealed fixing at each end on the mounting blocks. The thumb turn locks a ball into the recess in the telescoping shaft for a positive lock. Thumb turn rotation is less than two turns from lock to unlock, and there is no need to over tighten.

The Security Stay travel is limited to 55mm to limit the window opening. The stay needs to be positioned so that at its full extension, the window opening is limited to 100mm, as required by some local body bylaws for upper story windows.

Refer to technical documentation for more information on positioning/geometry



## Awning Windows

### Handed



Left hand example shown

## Casment Windows - 4201

#### Non Handed





## Right Angle Face Windows 4211

Note this product is handed specify LH or RH

### 4211 LH / 4211 RH

Left hand example shown



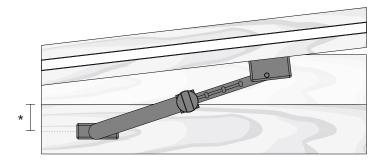

\* Adjust this dimension to fasten to solid timber away from the weather seal groove if applicable.