


## Rod 2 Timber Pull Handles



\*Shown in SCPV

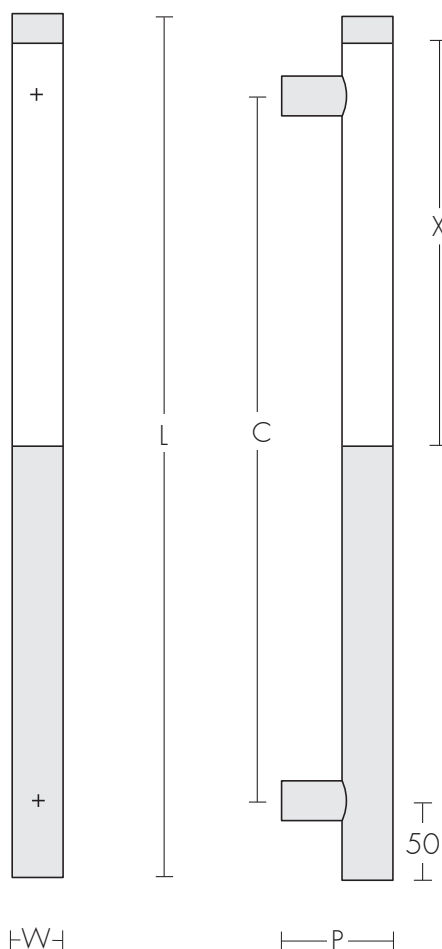

$$*(X) = \frac{1}{2} \text{ of handle length minus } 15\text{mm}$$

Code	Handle Length (L)	Fixing Centres (C)	Width (W)	Projection (P)
720A-T	600, 800, 1100	500, 700, 900	38	75
721A-T	450, 600, 800, 1100	500, 700, 900	31	70

Specify handle length at time of ordering. e.g **720A-T-600** (for 500mm centres)

The standard timbers available are Black Maire and American White Oak. Black Maire is a NZ native which is extremely hard wearing and does not require any surface finishing. Other timbers are available but they may incur surcharges.

Check with your local authorities as to the requirements of importing timber products.

Refer to the 'Mounting Options' Technical page for fixing information.

Bronze handles may be supplied up to 2mm undersize in diameter depending on the specific finish required. Contact us for more information.

### Custom Sizes

When custom handles are required, specify:

C = Hole centres of pillars

W = Diameter of rod

P = Height of handle

Products are available in an extensive range of finishes, see the finishes section for details.