


Tri Pull Handles



*Shown in SCPV

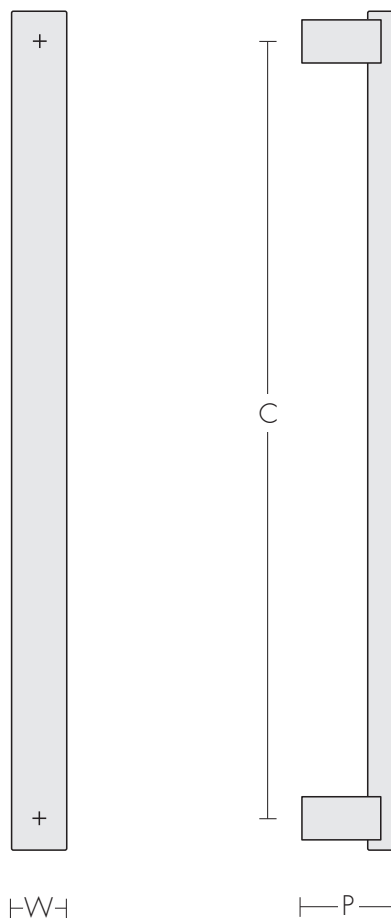


Code	Fixing Centres (C)	Width (W)	Projection (P)
5201	450, 600, 750, 900, 1000	38	60
5202	300, 450, 600	32	55
5203	200, 300, 400	25	45

Specify handle centres at time of ordering. e.g 5201-450 (for 450mm centres)

Tri handles are handed due to the triangular form, refer to the 'Door Handing' Technical sheet for information.

Note: Bronze base metal handles can only be made for 5201-450, 5202-300, 5203-(160, 192, 224)

Refer to the 'Mounting Options' Technical page for fixing information.

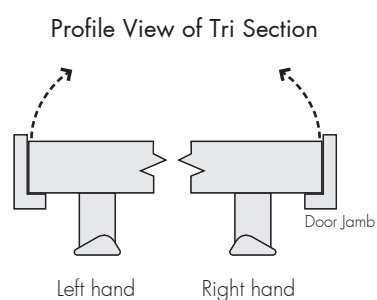

Products are available in an extensive range of finishes, see the finishes section for details.

Handing and Offset pillars

Tri Pull Handles are 'handed' left and right, because of their offset triangular form. They are suitable for standard doors and wide stile doors with standard pillars.

★ For narrow stile doors, specify offset pillars (25 or 50mm) to provide finger clearance between the handle and door edge or frame backstop, add suffix "OS 25" or "OS 50" to the order code.


Note: Bronze base metal handles can only be made for 5201-450, 5202-300, 5203-(160, 192, 224)

Tri 520 handles can also be made in lengths up to 2900mm in VVB, VBD and PBU
Refer to Tall Pull Handle details in this section.

- To specify special lengths, state:
- A: Handle section width 25mm, 32mm or 38mm.
 - B: Mounting pillar centres.
 - C: Handing: Left hand (LH) or Right hand (RH).

Example of specification:

	A	B	C
Tri	32mm	600mm	LH
Include Mounting option, Finish, Quantity			

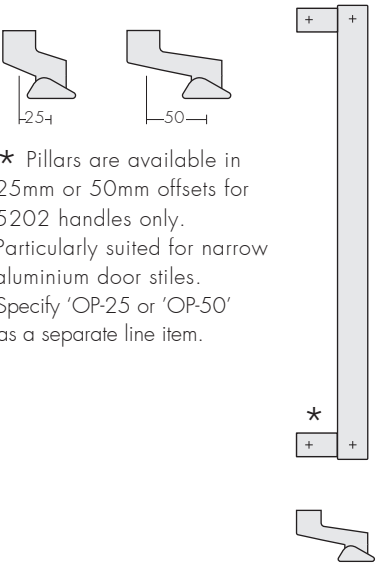

★ Pillars are available in 25mm or 50mm offsets for 5202 handles only. Particularly suited for narrow aluminium door stiles. Specify 'OP-25' or 'OP-50' as a separate line item.