


Pull Handle Mounting Options


Mounting Option 1

Back to Back (BTB) - Pairs of handles

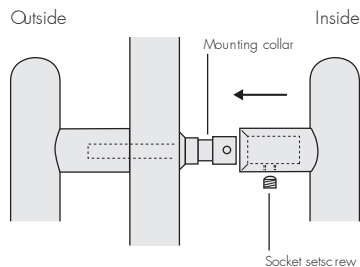


Mounting Option 2

Back Fixed (BF) - One pair of handles on two adjacent doors or a single handle on one door.



Mounting Option 3


Surface Fixed (SF) - One pair of handles on two adjacent doors or a single handle on one door




Mounting Option 4

Combination Handles (Pairs of dissimilar handles)

Top to Top, specify -TT

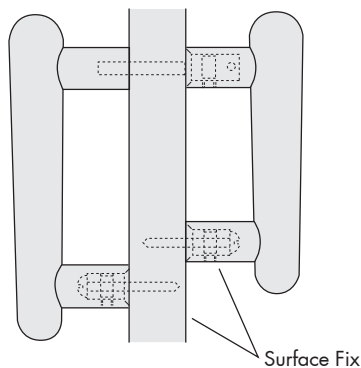

Bottom to Bottom, specify -BB



All Chant pull handles can be mounted onto glass doors, specify 'GDK' if required.

They can be fitted as back to back pairs, or single handles surface fixed or back fixed.

Pairs of handles will be supplied with nylon washers or plastic tape attached to the pillar as part of a glass door kit.







In the case of the 'Mason' range only, the handles are supplied with metal washers (colour matched) to cover the oversize holes in the glass.

Back fixed handles will be supplied as above on the handle side but also require the use of flat screws or dome nuts (as per pictures) for the internal side.

Mason handles require the use of the metal washers (colour matched) on the inside and flat / dome screw on the other.

Hole size and location vary from handle to handle so refer to handle specification drawings.

GDK includes: Nylon washers / plastic adhesive tape, plastic sleeves and if required metal washers (colour matched).

Mounting Option 2 - Fixing Options		
Countersunk slotted screw - M4,M5, M6 x 20 - 70mm	Code CS 	
Dome Screw - For glass or wooden doors M5,M6 x 75mm standard length supplied, OR specify door thickness.	Code DS 	
Flat Screw - For aluminium or wooden doors M5,M6 x 75mm Standard length supplied, OR specify door thickness	Code FS 	
Flat Screw with cover piece to match handle pillar sizing Cover - For aluminium or wooden doors M5, M6 x 75mm standard length supplied, OR specify door thickness.	Code FSC 