


# Pull Handle Mounting Options

## A - Mounting Option 1

### Back to Back Fixed




Outside

Inside


## B - Mounting Option 2

### Back Fixed



## C - Mounting Option 3

### Surface fixed




Note: Variations to surface fixing on metal doors over the page.

## D - Mounting Option 4 Combination Handles (Pairs of dissimilar handles)


Used in situations where handles are necessary on both sides of a door, and a change in size is required from one side to the other.

Example: Large handle on the outside of a front door with a smaller handle on the inside for the entry foyer.

### Top to Top, specify - TT

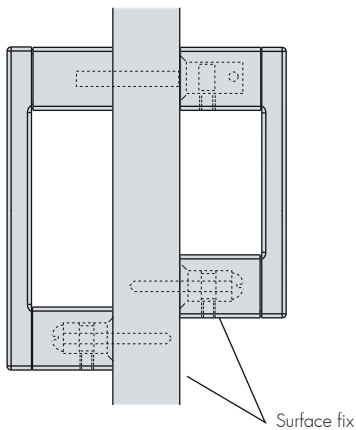

### Bottom to Bottom, specify - BB

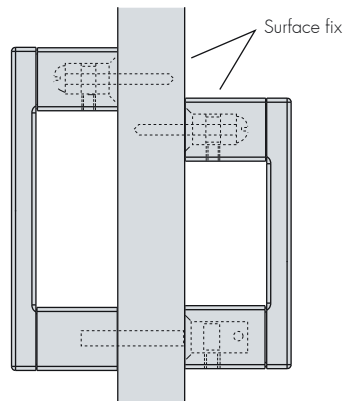

## Fastening options for back fixed handles

### Countersunk Screw - CS

M5 x 50mm - For small Mason pulls  
M6 x 50mm - Pulls under 700mm in length  
M8 x 50mm - Pulls over 700mm in length



### Dome Screw - DS

Glass or Timber doors  
M6 x \*75mm - Pulls under 700mm in length  
M8 x \*75mm - Pulls under 700mm in length




### Flat Screw - FS

Aluminium or Timber doors  
M6 x \*75mm - Pulls under 700mm in length  
M8 x \*75mm - Pulls under 700mm in length



### Flat Screw & Cover - FSC

Aluminium or Timber doors  
M6 x \*75mm - Pulls under 700mm in length  
M8 x \*75mm - Pulls over 700mm in length

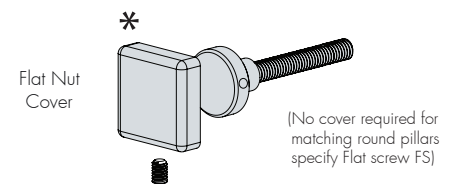


Dome and Flat screws are tightend with hex key  
\* Standard length or specify door thickness

# Pull Handle Mounting Options

## Glass Doors


### Back to Back Fixed




Outside

Inside

### Back Fixed



### Glass Door Kit - GDK



All Chant pull handles can be mounted onto glass doors, specify 'GDK' if required.

They can be fitted as back to back pairs, or single handles surface fixed or back fixed.

Pairs of handles will be supplied with nylon washers or plastic tape attached to the pillar as part of a glass door kit.

In the case of the 'Mason' range only, the handles are supplied with metal washers (colour matched) to cover the oversize holes in the glass.

Back fixed handles will be supplied as above on the handle side but also require the use of flat screws or dome nuts (as per pictures) for the internal side.

Mason handles require the use of the metal washers (colour matched) on the inside and flat / dome screw on the other.

Hole size and location vary from handle to handle so refer to handle specification drawings.

GDK includes: Nylon washers / plastic adhesive tape, plastic sleeves and if required metal washers (colour matched).